


# Beam scale LWC-BSE

## **Robust beam scale with electro-galvanized surface**

Often used for weighing goods of varying lengths. Or for montage under carriers. Only 80 mm high. Capacity 2000 kg x 0.5 kg (standard) or 3500 kg x 1 kg.

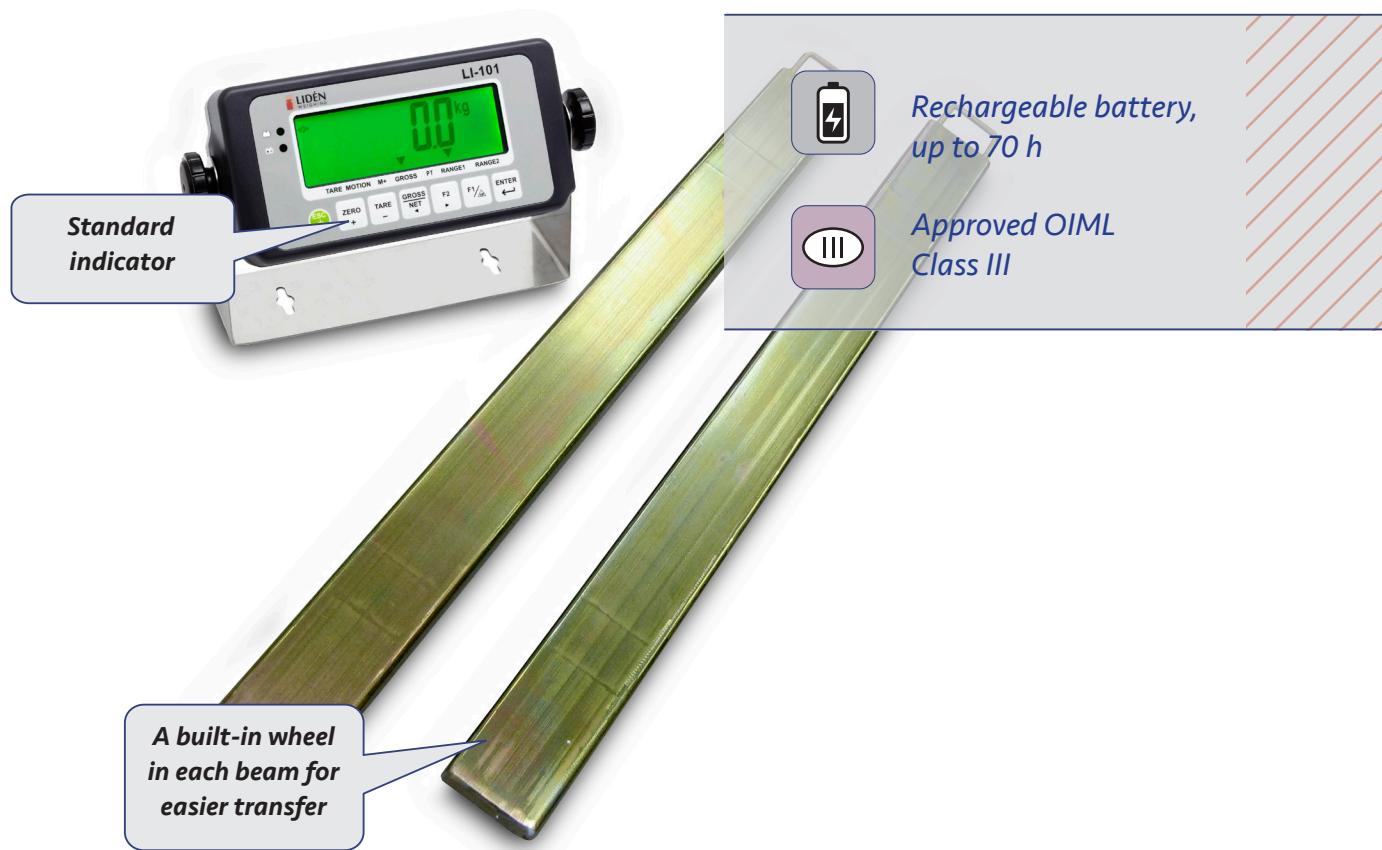


## Benefits


- ✓ Two beams of size 1250 x 120 each
- ✓ Very robust construction with electro-galvanized surface
- ✓ Four steel load cells, nickel plated with IP-67 protection
- ✓ Handle and cable protection on each beam


Technical specifications	LWC-BSE, 2000	LWC-BSE, 3500
Capacity (kg)	2000	3500
Readability (kg)	0,5	1
Accuracy (kg)	+/-0,5	+/-1
Size, beam (mm)	1250 x 120	1250 x 120
Size, product (WxLxH mm)	120 x 1250 x 80	120 x 1250 x 80
Net weight (kg)	33	33
Display	25 mm LCD display with LED backlight.	





LCD display with LED backlight


- 


External adjustment
- 


Density class IP-67
- 


LCD display with LED backlight
- 


Tolerance weighing
- 


Approved
- 


Load cell
- 


Animal weighing
- 


Approved OIML Class III
- 

Rechargeable battery
- 

CE-märkt
- 

Adapter
- 

Warranty 1 year
- 

Plastic (ABS)
- 

Metal